

LS20

20-Gauge Commercial
Steel Doors

LS20

20-gauge commercial steel doors



Fire-Rated*

- Up to 3hr.
- Singles / Pairs



Hurricane*


- Up to +/- 75psf
- Singles / Pairs



Thermal Value

- R Value = 2.08 - 7.14
- U Value = 0.48 - 0.14

- △ **Alternative to heavier gauge doors**
- △ **Maximum size 3'0 x 7'0**
- △ **Suitable for many interior or exterior applications**

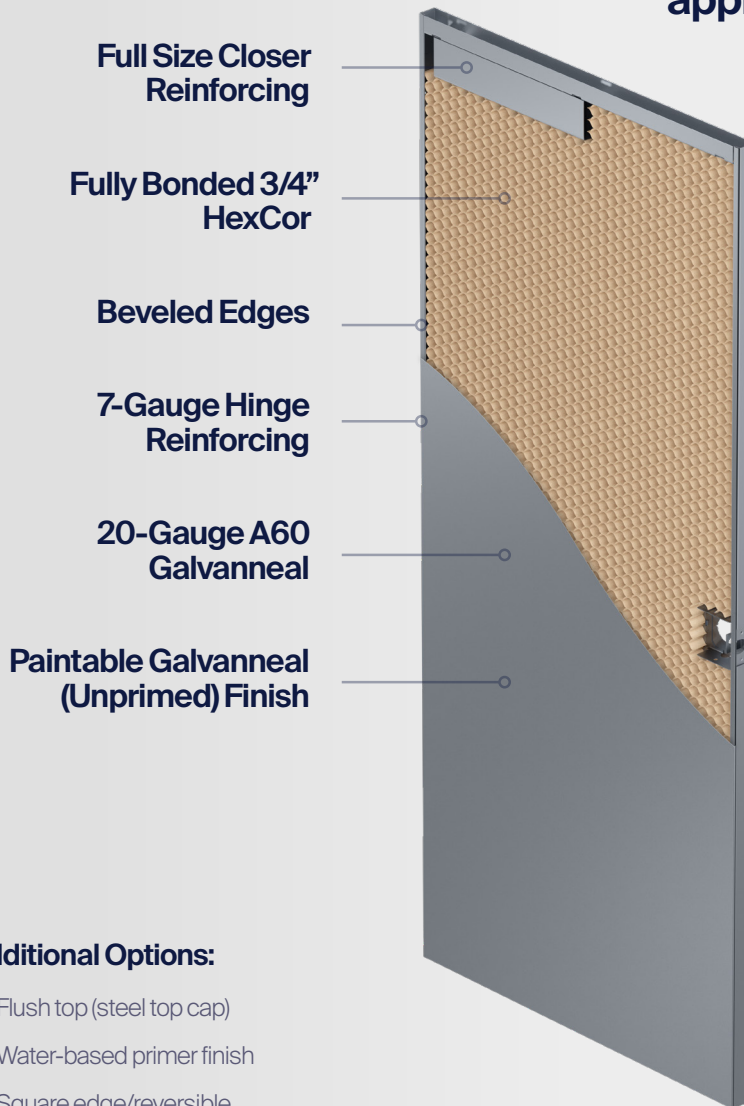

Performance Tested

Independently tested to meet the highest standards in performance for fire and severe weather testing, all backed by a one-year factory warranty.

Sustainable Design

All door components are manufactured from environmentally responsible materials using the industry's most advanced manufacturing processes. LEED credits available for recycled content, indoor air quality, and regional sourcing.

Hardware Compatibility

Compatible with all leading providers of security and access control systems, for both electrified and mechanical hardware.

Additional Options:

- Flush top (steel top cap)
- Water-based primer finish
- Square edge/reversible
- Window and louver cutouts
- Insulated cores

Applicable Standards:

- ANSI/BHMA A156.115
- ANSI A250.4
- ASTM A653
- ANSI A250.10
- UL 10B
- UL 10C
- ASTM E2010
- ASTM E2074
- CAN4 S104
- ASTM E90
- ASTM E413

*See specific listings for full details



DAYBAR

daybar.com
(888) 332-9227

architects@daybar.com
sales@daybar.com

DAYBAR XPRESS